



2P multi-outlet plug - 2 side outputs with USB Type-A+C

Cat. No(s): 0 494 01 - 6 945 91/93



0 494 01



6 945 91/93


1. USE

For connection to 2P or 2P+E wall outlets.
 With USB Type-A + USB Type-C for charging smartphones, tablets and other electronic devices.
 French/German standard.

2. RANGE

Description	White/Dark Grey
2P multi-outlet plug with safety shutter, 2 side outputs, 1 USB Type-A+C charging module Equipped with a stand for a smartphone and a storage system for the end of the USB cord.	0 494 01 6 945 91 6 945 93

3. DIMENSIONS (mm)

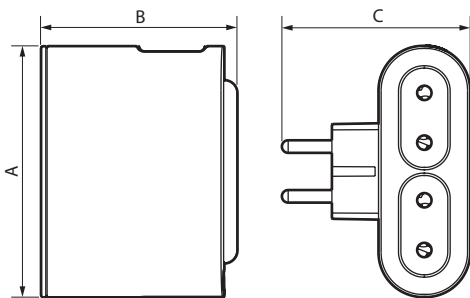

A	B	C
96	75	72

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact tests: IK 04
 Protection against solid/bodies and liquids: IP 20

■ 4.2 Material characteristics

Matt White RAL 9003/Dark Grey RAL 7024 Plastic + Thermoplastic

Halogen-free
 UV-resistant

Self-extinguishing:

750°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ 4.3 Electrical characteristics

Voltage: 230 V~
 Frequency: 50 Hz

2 sorties latérales 2 P :	0 494 01	6 945 91	6 945 93
Intensité	6 A	2,5 A	10 A
Puissance MAXI	2760 W	1150 W	3680 W

USB charger:

1 USB Type-A port + 1 USB Type-C port
 3.0 A - 5.0 V = 15.0 W max.
 Average active efficiency: 84.8%
 Low-load efficiency (10%): 82.3%
 Electricity consumption when not charging: 0.09 W

■ 4.4 Climate characteristics

Usage temperature: -5°C to +35°C
 Storage temperature: -20°C to +70°C

5. CARE

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Caution: Always test before using other special cleaning products.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards
 See e. catalogue.