



2P+E multi-outlet plugs 3 side outputs

Cat. No(s): 0 494 35/38 - 6 945 20/23



0 494 35



6 945 20


1. USE

For connection to 2P+E wall outlets.
3 side outputs.

2. RANGE

Description	White	Aluminium
	Dark Grey	Dark Grey
Compact 2P+E multi-outlet plugs with safety shutter - 3 side outputs French/Belgian standard	0 494 35	0 494 38
Compact 2P+E multi-outlet plugs with safety shutter - 3 side outputs German standard	6 945 20	6 945 23

3. DIMENSIONS (mm)

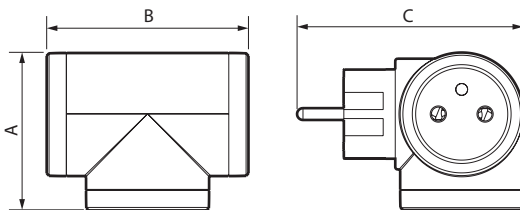

Cat. Nos	A	B	C
0 494 35/38	64	82	92
6 945 20/23	63	88	88

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact tests: IK 04
Protection against solid/bodies and liquids: IP 20

■ 4.2 Material characteristics

Matt Plastic + thermoplastic:
White RAL 9003/Dark Grey RAL 7024
Painted Aluminium

Halogen-free
UV-resistant

Self-extinguishing:
750°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

■ 4.3 Electrical characteristics

Voltage: 230 V~
Frequency: 50 Hz
Current: 16 A
Power: max. 3680 W

■ 4.4 Climate characteristics

Usage temperature: -5°C to +35°C
Storage temperature: -20°C to +70°C

5. CARE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Caution: Always test before using other special cleaning products.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards
See e. catalogue.